



# ALLIED MACHINE & ENGINEERING

Holemaking Solutions for Today's Manufacturing



Drilling



Reaming



Burnishing



Threading



Specials



## Wohlhaupter®

► **BORING**

Master Shanks with MVS Connection

**WOHLHAUPTER®**



The background of the entire page is a solid red color. Overlaid on this are several concentric circles and a grid of thin, light-red lines. The circles are centered on the left side of the page and expand towards the right. The grid lines are horizontal and vertical, creating a subtle pattern across the entire surface.

SECTION

---

# B10-F

---

Master Shanks with MVS Connection

# Wohlhaupter® Master Shanks with MVS Connection



## The MVS Connection

Wohlhaupter MVS connection shanks provide a high level of accuracy when building or replacing components. Our master shanks adapt to any machine tool spindle, making it easy to find the shank you need.

Your safety and the safety of others is very important. This catalog contains important safety messages. Always read and follow all safety precautions.



This triangle is a safety hazard symbol. It alerts you to potential safety hazards that can cause tool failure and serious injury.

When you see this symbol in the catalog, look for a related safety message that may be near this triangle or referred to in the nearby text.

There are safety signal words also used in the catalog. Safety messages follow these words.

### **WARNING**

**WARNING** (shown above) means that failure to follow the precautions in this message could result in tool failure and serious injury.

**NOTICE** means that failure to follow the precautions in this message could result in damage to the tool or machine but not result in personal injury.

**NOTE** and **IMPORTANT** are also used. These are important that you read and follow but are not safety-related.

Visit [www.alliedmachine.com](http://www.alliedmachine.com) for the most up-to-date information and procedures.

## Applicable Industries



Aerospace



Agriculture



Automotive



Firearms



General  
Machining




Oil & Gas




Renewable  
Energy

## Reference Icons


The following icons will appear throughout the catalog to help you navigate between products.



**MVS Connection Color Guide**  
Detailed instructions and information regarding the MVS connection(s)



**Recommended Cutting Data**  
Speed and feed recommendations for optimum and safe boring



**Clamping Elements**  
Collet chucks for carbide shanks



**Coolant-Through Option**  
Indicates that the product is coolant through


## Master Shanks with MVS Connection Table of Contents

<b>249 (248) Shanks</b> . . . . .	2
<b>Carbide Shanks</b> . . . . .	3
<b>HSK Shanks (DIN 69893)</b> . . . . .	4 - 5
<b>Polygon Shaft Shanks (PSC) (ISO26623-1)</b> . . . . .	6
<b>Dual Contact CAT Shanks with Imperial Threads</b> . . . . .	7
<b>CAT Shanks with Imperial Threads</b> . . . . .	8
<b>CAT Shanks with Metric Threads</b> . . . . .	9
<b>Dual Contact SK Shanks (DIN 69871-AD / BD)</b> . . . . .	10
<b>SK Shanks (DIN 69871-AD / B-D)</b> . . . . .	11
<b>Dual Contact BT Shanks (JIS B 6339)</b> . . . . .	12
<b>BT Shanks (JIS B 6339)</b> . . . . .	13
<b>NMTB Shanks</b> . . . . .	14
<b>Imperial Straight Shanks</b> . . . . .	15
<b>DIN 2080 Shanks</b> . . . . .	16
<b>Morse Taper Shanks (DIN 1806) &amp; R8 Shanks</b> . . . . .	17
<b>Accessories</b> . . . . .	18 - 19
<b>Mounting Fixtures</b> . . . . .	20



## 249 (248) Shanks


Steel | Carbide

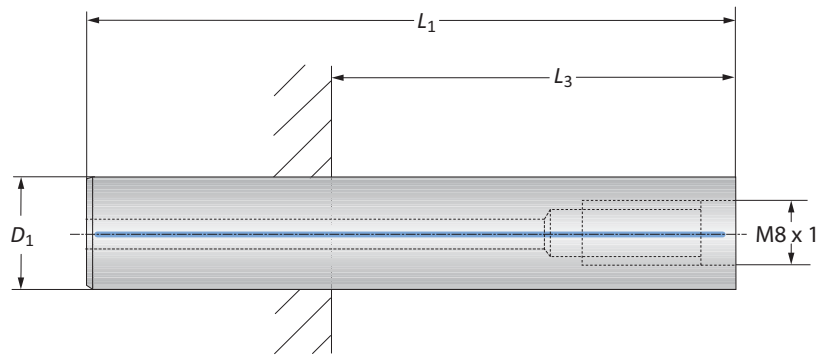

### Steel Shanks

	Connection	Shank			$L_3$ min*			Weight	Part No.
		$D_1$	$L_1$	$L_3$ max*	SK 40+50	HSK-A 63	HSK-A 100		
i	M8 x 1	0.591	3.346	1.456	—	—	—	0.220 (lbs)	248136
	M8 x 1	0.709	3.937	2.047	—	0.196	0.472	0.440 (lbs)	248137
	M8 x 1	0.906	4.606	2.716	—	0.866	1.141	0.881 (lbs)	248138
m	M8 x 1	15.00	85.00	37.00	—	—	—	0.10 (kg)	248136
	M8 x 1	18.00	100.00	52.00	—	5.00	12.00	0.20 (kg)	248137
	M8 x 1	23.00	117.00	69.00	—	22.00	29.00	0.40 (kg)	248138


\* $L_3$  dimensions apply to collet chucks

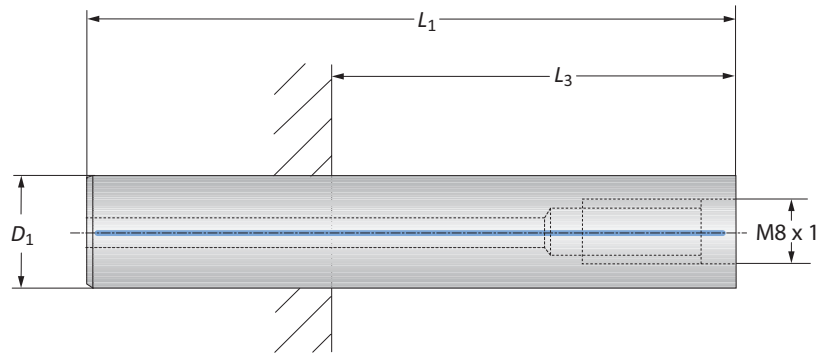

### Carbide Shanks

	Connection	Shank			$L_3$ min*			Weight	Part No.
		$D_1$	$L_1$	$L_3$ max*	SK 40	SK 50	HSK-A 63		
i	M8 x 1	0.591	5.118	3.228	0.787	0.787	1.377	0.661 (lbs)	248142
	M8 x 1	0.709	6.102	4.212	1.535	0.826	2.362	1.322 (lbs)	248143
	M8 x 1	0.906	7.086	5.196	2.519	1.811	3.346	2.425 (lbs)	248144
	M8 x 1	0.906	9.527	7.637	4.960	4.251	5.787	3.086 (lbs)	248145
m	M8 x 1	15.00	130.00	82.00	20.00	20.00	35.00	0.30 (kg)	248142
	M8 x 1	18.00	155.00	107.00	39.00	21.00	60.00	0.60 (kg)	248143
	M8 x 1	23.00	180.00	132.00	64.00	46.00	85.00	1.10 (kg)	248144
	M8 x 1	23.00	242.00	194.00	126.00	108.00	147.00	1.40 (kg)	248145

\* $L_3$  dimensions apply to collet chucks



i = Imperial (in)  
m = Metric (mm)


**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight
- Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio
- Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

## Carbide Master Shanks

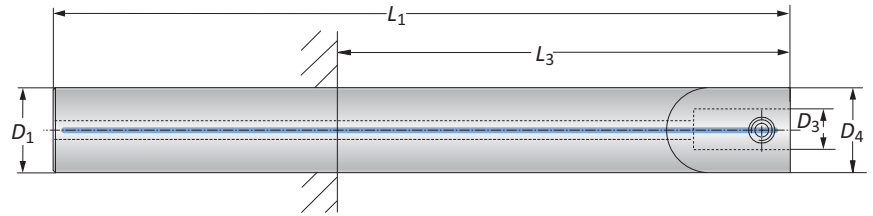


Connection		Shank			L <sub>3</sub> min					
D <sub>4</sub>   D <sub>3</sub>		L <sub>1</sub>	D <sub>1</sub>	L <sub>3</sub> max	SK 40	SK 50	HSK-A 63	HSK-A 100	Weight	Part No.
i	18 - 11	6.102	0.709	4.213	1.535	1.024	2.362	2.638	1.102 (lbs)	299009*
	22 - 11	5.512	0.866	3.622	1.102	1.102	1.772	2.047	1.543 (lbs)	299001*
	22 - 11	7.480	0.866	5.591	2.913	2.205	3.740	4.016	1.984 (lbs)	299002*
	22 - 11	9.049	0.866	7.205	4.528	3.819	5.354	5.630	2.425 (lbs)	299003*
	25 - 14	6.496	0.984	4.606	1.929	1.417	2.756	3.031	2.205 (lbs)	299004*
	25 - 14	8.465	0.984	6.575	3.898	3.189	4.724	5.000	2.866 (lbs)	299005*
	32 - 18	8.268	1.260	–	5.354	5.354	5.572	5.394	4.630 (lbs)	299006**
	32 - 18	10.236	1.260	–	7.323	7.323	7.441	7.362	5.732 (lbs)	299007**
40 - 22	16.399	1.575	–	–	13.110	–	13.110	11.460 (lbs)	299008**	
m	18 - 11	155.00	18.00	107.00	39.00	26.00	60.00	67.00	0.50 (kg)	299009*
	22 - 11	140.00	22.00	92.00	28.00	28.00	45.00	52.00	0.70 (kg)	299001*
	22 - 11	190.00	22.00	142.00	74.00	56.00	95.00	102.00	0.90 (kg)	299002*
	22 - 11	231.00	22.00	183.00	115.00	97.00	136.00	143.00	1.10 (kg)	299003*
	25 - 14	165.00	25.00	117.00	49.00	36.00	70.00	77.00	1.00 (kg)	299004*
	25 - 14	215.00	25.00	167.00	99.00	81.00	120.00	127.00	1.30 (kg)	299005*
	32 - 18	210.00	32.00	–	136.00	136.00	139.00	137.00	2.10 (kg)	299006**
	32 - 18	260.00	32.00	–	186.00	186.00	189.00	187.00	2.60 (kg)	299007**
	40 - 22	415.00	40.00	–	–	333.00	–	333.00	5.20 (kg)	299008**

**NOTE:** Adapter shanks are used for extensions up to 10xD

\*Recommended clamping element: collet chuck ISO 15488 (DIN 6499-B) (pg. B10-I: 5)

\*\*Recommended clamping element: collet chuck ISO 10897 (DIN 6388) (pg. B10-I: 5)




i = Imperial (in)  
m = Metric (mm)

⚠ <b>WARNING</b>	<b>Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:</b>
	<ul style="list-style-type: none"> <li>-Consult machine tool builder for machine's weight limitations.</li> <li>-Refer to example on page B10-M: 11 for calculating tool assembly weight</li> </ul> <p>Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611   email: <a href="mailto:appeng@alliedmachine.com">appeng@alliedmachine.com</a></p>
⚠ <b>WARNING</b>	<b>Tool failure can cause serious injury. To prevent:</b>
	<ul style="list-style-type: none"> <li>-Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)</li> <li>-When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio</li> <li>-When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio</li> <li>-When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio</li> <li>-When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio</li> <li>-When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio</li> <li>-Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio</li> </ul> <p>Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611   email: <a href="mailto:appeng@alliedmachine.com">appeng@alliedmachine.com</a></p>

## HSK Master Shanks (DIN 69893)

Imperial | Balanced

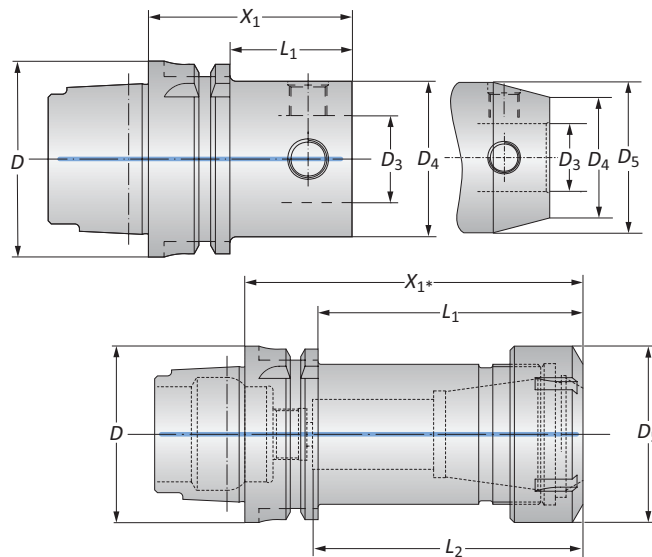


Taper Size	Connection	Shank				Weight	Part No.
D	D <sub>4</sub>   D <sub>3</sub>	X <sub>1</sub>	L <sub>1</sub>	L <sub>2</sub>	D <sub>5</sub>		
40	40 - 22	2.205	—	—	—	0.881 (lbs)	246016
40	50 - 28	2.756	—	—	—	1.543 (lbs)	246004
50	40 - 22	2.205	1.181	—	—	1.322 (lbs)	246015
50	50 - 28	2.559	—	—	—	1.763 (lbs)	245011
63	25 - 14	1.811	0.787	—	—	1.543 (lbs)	246012
63	32 - 18	2.205	1.181	—	—	1.763 (lbs)	246013
63	40 - 22	2.205	1.181	—	—	1.764 (lbs)	246014
63	50 - 28	2.559	1.535	—	—	2.425 (lbs)	245012
63	63 - 36	3.150	—	—	—	3.306 (lbs)	245013
63	80 - 36	3.150	—	—	—	4.629 (lbs)	246009
63	ER 40	4.724	3.700	3.740	2.480	3.747 (lbs)	252090**
100	50 - 28	2.559	1.417	—	—	5.291 (lbs)	245014
100	50 - 28	7.087	5.944	—	2.362	11.020 (lbs)	246020
100	50 - 28*	7.087	5.944	—	—	6.393 (lbs)	246021
100	63 - 36	3.150	2.007	—	—	6.393 (lbs)	245015
100	63 - 36	8.071	6.929	—	3.070	17.190 (lbs)	246019
100	63 - 36	8.071	6.929	—	—	17.190 (lbs)	246022
100	80 - 36	3.150	2.007	—	—	8.157 (lbs)	245016
100	80 - 36	10.03	8.897	—	3.543	27.770 (lbs)	246018
100	80 - 36	10.03	8.897	—	—	22.920 (lbs)	246023
100	100 - 56	3.937	—	—	—	11.020 (lbs)	246010
100	100 - 56	11.810	8.700	—	—	38.580 (lbs)	246017
100	ER 40	4.724	3.582	3.464	2.480	7.716 (lbs)	252091**

**NOTE:** Balanced refers to a specific residual imbalance of ≤4.00 gmm/kg

\*D<sub>4</sub> = 49.50

\*\*Balanced without clamping nut  
B10-M: 12-15  
B10: vi-vii



i = Imperial (in)  
m = Metric (mm)

**1. WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**1. WARNING** Tool failure can cause serious injury. To prevent:


- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)



## HSK Master Shanks (DIN 69893)

Metric | Balanced

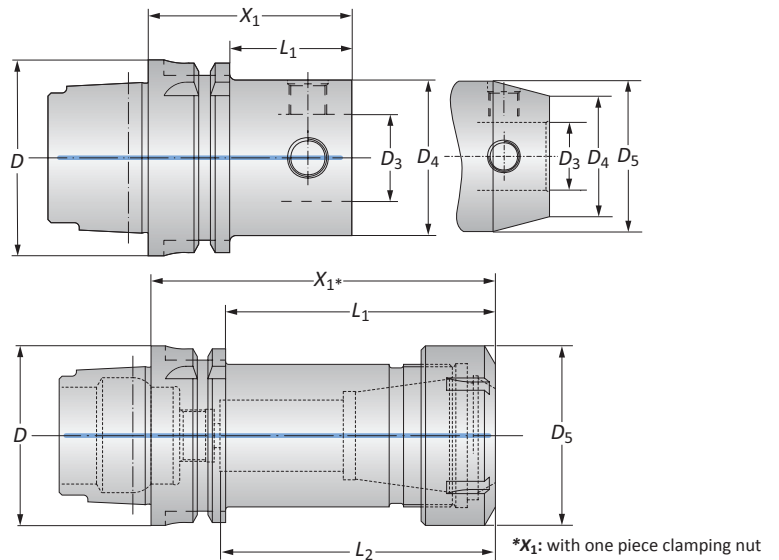


Taper Size	Connection	Shank					
D	D <sub>4</sub>   D <sub>3</sub>	X <sub>1</sub>	L <sub>1</sub>	L <sub>2</sub>	D <sub>5</sub>	Weight	Part No.
40	40 - 22	56.00	—	—	—	0.40 (kg)	246016
40	50 - 28	70.00	—	—	—	0.70 (kg)	246004
50	40 - 22	56.00	30.00	—	—	0.60 (kg)	246015
50	50 - 28	65.00	—	—	—	0.80 (kg)	245011
63	25 - 14	46.00	20.00	—	—	0.70 (kg)	246012
63	32 - 18	56.00	30.00	—	—	0.80 (kg)	246013
63	40 - 22	56.00	30.00	—	—	0.80 (kg)	246014
63	50 - 28	65.00	39.00	—	—	1.10 (kg)	245012
63	63 - 36	80.00	—	—	—	1.50 (kg)	245013
63	80 - 36	80.00	—	—	—	2.10 (kg)	246009
63	ER 40	120.00	94.00	95.00	63.00	1.70 (kg)	252090**
100	50 - 28	65.00	36.00	—	—	2.40 (kg)	245014
100	50 - 28	180.00	151.00	—	60.00	5.00 (kg)	246020
100	50 - 28*	180.00	151.00	—	—	4.00 (kg)	246021
100	63 - 36	80.00	51.00	—	—	2.90 (kg)	245015
100	63 - 36	205.00	176.00	—	78.00	7.80 (kg)	246019
100	63 - 36	205.00	176.00	—	—	7.80 (kg)	246022
100	80 - 36	80.00	51.00	—	—	3.70 (kg)	245016
100	80 - 36	255.00	226.00	—	90.00	12.60 (kg)	246018
100	80 - 36	255.00	226.00	—	—	10.40 (kg)	246023
100	100 - 56	100.00	—	—	—	5.00 (kg)	246010
100	100 - 56	300.00	221.00	—	—	17.50 (kg)	246017
100	ER 40	120.00	91.00	88.00	63.00	3.50 (kg)	252091**

**NOTE:** Balanced refers to a specific residual imbalance of ≤4.00 gmm/kg

\*D<sub>4</sub> = 49.50mm

\*\*Balanced without clamping nut  
B10-M: 12-15      B10: vi-vii

Key on B10-F: 1



ⓘ = Imperial (in)

Ⓜ = Metric (mm)

**⚠ WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

-Consult machine tool builder for machine's weight limitations.

-Refer to example on page B10-M: 11 for calculating tool assembly weight

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**⚠ WARNING** Tool failure can cause serious injury. To prevent:

-Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)

-When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio

-When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio

-When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio

-When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio



-When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio

-Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)


## Polygon Shaft Master Shanks (PSC) (ISO 26623-1)

Balanced

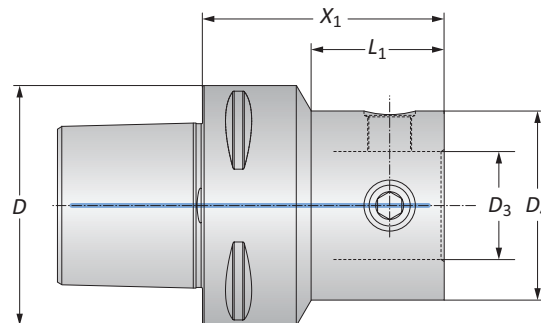

PSC	Connection	Shank		Weight	Part No.
D	D <sub>4</sub>   D <sub>3</sub>	X <sub>1</sub>	L <sub>1</sub>		
50	40 - 22	2.126	1.224	1.543 (lbs)	227014
50	50 - 28	2.559	—	2.205 (lbs)	227001
50	63 - 36	3.150	—	3.307 (lbs)	227002
50	80 - 36	3.150	—	5.512 (lbs)	227012
63	25 - 14	2.126	0.838	1.984 (lbs)	227010
63	32 - 18	2.126	0.917	2.205 (lbs)	227009
63	40 - 22	2.559	1.433	2.425 (lbs)	227008
63	50 - 28	2.559	1.555	2.866 (lbs)	227003
63	63 - 36	3.150	—	3.968 (lbs)	227004
63	80 - 36	3.150	—	5.732 (lbs)	227005
80	50 - 28	2.559	1.047	4.850 (lbs)	227011
80	63 - 36	3.150	1.783	5.732 (lbs)	227006
80	80 - 36	3.150	—	7.275 (lbs)	227007
50	40 - 22	54.00	31.10	0.70 (kg)	227014
50	50 - 28	65.00	—	1.00 (kg)	227001
50	63 - 36	80.00	—	1.50 (kg)	227002
50	80 - 36	80.00	—	2.50 (kg)	227012
63	25 - 14	54.00	21.10	0.90 (kg)	227010
63	32 - 18	54.00	23.00	1.00 (kg)	227009
63	40 - 22	65.00	36.40	1.10 (kg)	227008
63	50 - 28	65.00	39.00	1.30 (kg)	227003
63	63 - 36	80.00	—	1.80 (kg)	227004
63	80 - 36	80.00	—	2.60 (kg)	227005
80	50 - 28	65.00	25.00	2.20 (kg)	227011
80	63 - 36	80.00	45.10	2.60 (kg)	227006
80	80 - 36	80.00	—	3.30 (kg)	227007

**NOTE:** Balanced refers to a specific residual imbalance of ≤4.00 gmm/kg



i = Imperial (in)  
m = Metric (mm)

**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight


Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

## Dual Contact CAT Master Shanks with Imperial Threads

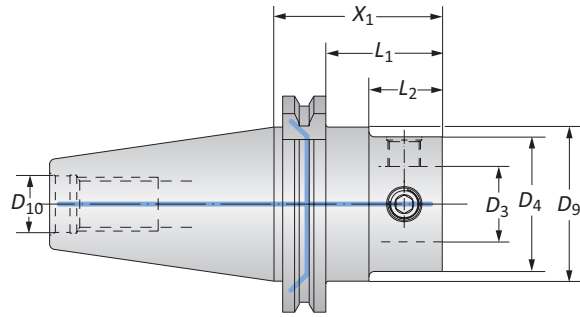



	Taper Size	Connection	Shank					Weight	Part No.
		D <sub>4</sub>   D <sub>3</sub>	X <sub>1</sub>	L <sub>1</sub>	L <sub>2</sub>	D <sub>9</sub>	D <sub>10</sub>		
i	40	50 - 28	2.440	1.688	1.062	1.752	5/8 - 11	2.866 (lbs)	353062
	40	50 - 28	5.394	4.642	4.016	1.752	5/8 - 11	5.292 (lbs)	353076
	40	63 - 36	3.228	2.440	1.850	1.752	5/8 - 11	3.968 (lbs)	353063
	50	50 - 28	2.440	1.689	1.062	2.752	1 - 8	7.275 (lbs)	353061
	50	50 - 28*	7.953	7.201	6.575	2.752	1 - 8	11.687 (lbs)	353077
	50	63 - 36	2.835	2.083	1.457	2.752	1 - 8	7.938 (lbs)	353078
	50	63 - 36	8.740	7.988	7.362	2.752	1 - 8	15.656 (lbs)	353079
	50	80 - 36	2.834	2.082	1.456	2.752	1 - 8	9.039 (lbs)	353060
	50	80 - 36	10.709	9.957	9.331	2.752	1 - 8	26.240 (lbs)	353080
	50	100 - 56	4.134	3.382	2.756	2.752	1 - 8	13.230 (lbs)	353081
m	50	100 - 56	12.008	11.256	10.630	2.752	1 - 8	39.470 (lbs)	353082
	40	50 - 28	62.00	42.90	27.00	44.50	5/8 - 11	1.30 (kg)	353062
	40	50 - 28	137.00	117.90	102.00	44.50	5/8 - 11	2.40 (kg)	353076
	40	63 - 36	82.00	62.90	47.00	44.50	5/8 - 11	1.80 (kg)	353063
	50	50 - 28	62.00	42.90	27.00	69.90	1 - 8	3.30 (kg)	353061
	50	50 - 28*	202.00	182.90	167.00	69.90	1 - 8	5.30 (kg)	353077
	50	63 - 36	72.00	52.90	37.00	69.90	1 - 8	3.60 (kg)	353078
	50	63 - 36	222.00	202.90	187.00	69.90	1 - 8	7.10 (kg)	353079
	50	80 - 36	72.00	52.90	37.00	69.90	1 - 8	4.10 (kg)	353060
	50	80 - 36	272.00	252.90	237.00	69.90	1 - 8	11.90 (kg)	353080
	50	100 - 56	105.00	85.90	70.00	69.90	1 - 8	6.00 (kg)	353081
	50	100 - 56	305.00	285.90	270.00	69.90	1 - 8	17.90 (kg)	353082

\*D<sub>4</sub> = 49.50

B10-M: 12-15

B10: vi-vii

Key on B10-F: 1



i = Imperial (in)

m = Metric (mm)


**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight
- Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:


- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio
- Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

## CAT Master Shanks with Imperial Threads

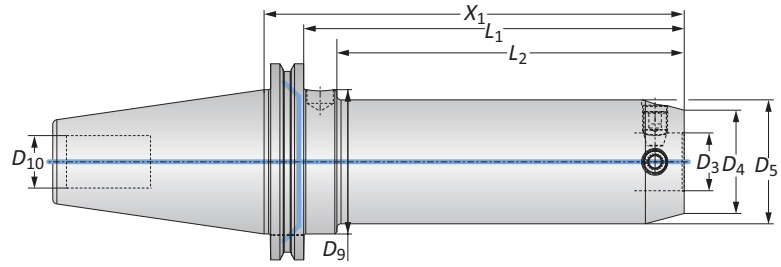

Taper Size	Connection $D_4   D_3$	Shank						Weight	Part No.
		$X_1$	$L_1$	$L_2$	$D_5$	$D_9$	$D_{10}$		
30	40 - 22	2.362	1.612	-	-	-	$\frac{1}{2}$ - 13	1.322 (lbs)	353001
30	50 - 28	2.756	2.006	-	-	-	$\frac{1}{2}$ - 13	1.763 (lbs)	353002
40	25 - 14	2.165	1.415	0.787	-	1.750	$\frac{5}{8}$ - 11	2.204 (lbs)	353011
40	25 - 14	5.551	4.800	4.173	1.102	1.750	$\frac{5}{8}$ - 11	3.306 (lbs)	353012
40	32 - 18	2.559	1.809	1.181	-	1.750	$\frac{5}{8}$ - 11	2.425 (lbs)	353013
40	32 - 18	6.732	5.982	5.354	1.378	1.750	$\frac{5}{8}$ - 11	4.188 (lbs)	353014
40	40 - 22	2.165	1.415	0.787	-	1.750	$\frac{5}{8}$ - 11	2.491 (lbs)	353003
40	40 - 22	6.378	5.628	-	1.850	1.750	$\frac{5}{8}$ - 11	5.511 (lbs)	353015
40	50 - 28	2.441	1.691	-	-	1.750	$\frac{5}{8}$ - 11	2.821 (lbs)	353004
40	50 - 28	5.394	4.644	-	-	1.750	$\frac{5}{8}$ - 11	5.291 (lbs)	353016
40	63 - 36	3.228	2.478	-	-	1.750	$\frac{5}{8}$ - 11	4.034 (lbs)	353005
40	63 - 36	6.181	5.431	-	-	1.750	$\frac{5}{8}$ - 11	7.936 (lbs)	353017
50	40 - 22	2.165	1.415	0.787	-	2.750	1 - 8	7.297 (lbs)	353006
50	40 - 22	6.378	5.628	5.000	1.850	2.750	1 - 8	9.920 (lbs)	353018
50	50 - 28	2.441	1.691	1.063	-	2.750	1 - 8	7.583 (lbs)	353007
50	50 - 28*	7.953	7.203	6.575	-	2.750	1 - 8	11.680 (lbs)	353025
50	50 - 28	7.953	7.203	6.575	2.362	2.750	1 - 8	14.100 (lbs)	353019
50	63 - 36	2.835	2.085	1.457	-	2.750	1 - 8	8.223 (lbs)	353008
50	63 - 36	8.740	7.990	7.362	-	2.750	1 - 8	15.650 (lbs)	353023
50	63 - 36	8.740	7.990	-	3.071	2.750	1 - 8	20.500 (lbs)	353020
50	80 - 36	2.835	2.085	-	-	2.750	1 - 8	9.413 (lbs)	353009
50	80 - 36	10.709	9.959	-	-	2.750	1 - 8	26.230 (lbs)	353024
50	80 - 36	10.709	9.959	-	3.543	2.750	1 - 8	31.300 (lbs)	353021
50	100 - 56	4.134	3.384	-	-	2.750	1 - 8	13.600 (lbs)	353010
50	100 - 56	12.008	11.258	-	-	2.750	1 - 8	39.460 (lbs)	353022

\* $D_4 = 49.50$



i = Imperial (in)  
m = Metric (mm)

**1. WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)


**1. WARNING** Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio


Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)



## CAT Master Shanks with Metric Threads

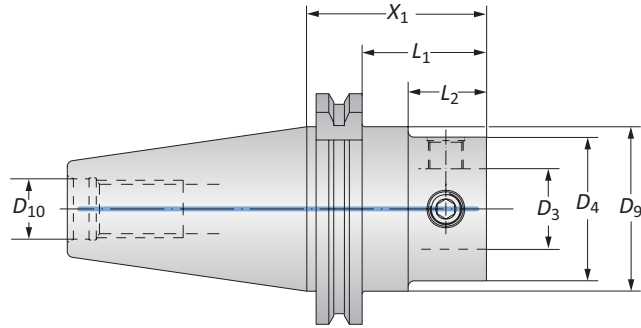


Taper Size		Connection	Shank					Weight	Part No.
			$X_1$	$L_1$	$L_2$	$D_9$	$D_{10}$		
m	40	50 - 28	62.00	42.90	—	44.45	M16 x 2	1.30 (kg)	132022T016960
	40	63 - 36	82.00	62.90	—	44.45	M16 x 2	1.80 (kg)	132066T016960
	50	50 - 28	62.00	42.90	27.00	69.85	M24 x 3	3.40 (kg)	132022T016962
	50	63 - 36	72.00	52.90	37.00	69.85	M24 x 3	3.70 (kg)	132066T016962
	50	80 - 36	72.00	52.90	—	69.85	M24 x 3	4.20 (kg)	132088T016962
	50	100 - 56	105.00	85.90	—	69.85	M24 x 3	5.20 (kg)	132076T016962




ⓘ = Imperial (in)  
Ⓜ = Metric (mm)

<p><b>⚠ WARNING</b> Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:</p> <ul style="list-style-type: none"> <li>-Consult machine tool builder for machine's weight limitations.</li> <li>-Refer to example on page B10-M: 11 for calculating tool assembly weight</li> </ul> <p>Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611   email: <a href="mailto:appeng@alliedmachine.com">appeng@alliedmachine.com</a></p>	
<p><b>⚠ WARNING</b> Tool failure can cause serious injury. To prevent:</p> <ul style="list-style-type: none"> <li>-Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)</li> <li>-When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio</li> <li>-When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio</li> <li>-When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio</li> <li>-When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio</li> <li>-When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio</li> <li>-Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio</li> </ul> <p>Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611   email: <a href="mailto:appeng@alliedmachine.com">appeng@alliedmachine.com</a></p>	

## Dual Contact SK Master Shanks (DIN 69871-AD / B-D)

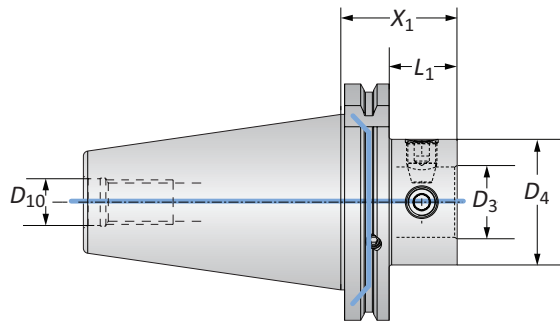

	Taper Size	Connection	Shank			Weight	Part No.
		$D_4   D_3$	$X_1$	$L_1$	$D_{10}$		
i	40	50 - 28	1.811	1.059	M16 x 2	2.426 (lbs)	353064
	40	63 - 36	2.598	1.846	M16 x 2	6.395 (lbs)	353065
	50	50 - 28	1.811	1.059	M24 x 3	6.395 (lbs)	353066
	50	63 - 36	2.205	1.453	M24 x 3	7.056 (lbs)	353067
	50	80 - 36	2.205	1.453	M24 x 3	8.159 (lbs)	353068
	50	100 - 56	3.543	2.791	M24 x 3	11.687 (lbs)	353069
m	40	50 - 28	46.00	26.90	M16 x 2	1.10 (kg)	353064
	40	63 - 36	66.00	46.90	M16 x 2	1.50 (kg)	353065
	50	50 - 28	46.00	26.90	M24 x 3	2.90 (kg)	353066
	50	63 - 36	56.00	36.90	M24 x 3	3.20 (kg)	353067
	50	80 - 36	56.00	36.90	M24 x 3	3.70 (kg)	353068
	50	100 - 56	90.00	70.90	M24 x 3	5.30 (kg)	353069



i = Imperial (in)  
m = Metric (mm)

**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio


Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)





## SK Master Shanks (DIN 69871-AD / B-D)

Balanced

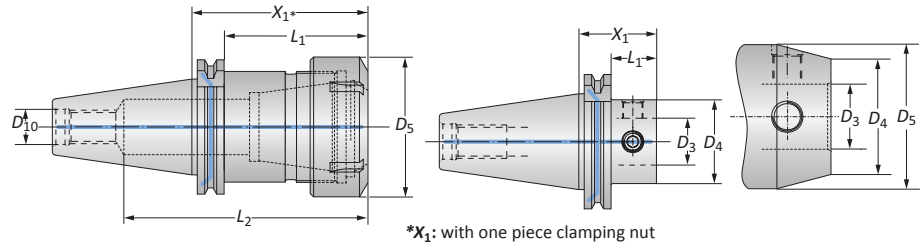

	Taper Size	Connection	Shank					Weight	Part No.
		D <sub>4</sub>   D <sub>3</sub>	X <sub>1</sub>	L <sub>1</sub>	L <sub>2</sub>	D <sub>5</sub>	D <sub>10</sub>		
i	30	40 - 22	1.811	1.059	—	—	M12 x 1.75	1.103 (lbs)	327001
	30	50 - 28	2.283	1.531	—	—	M12 x 1.75	1.764 (lbs)	327002
	40	32 - 18	2.165	1.413	—	1.575	M16 x 2	2.426 (lbs)	327003
	40	40 - 22	1.811	1.059	—	—	M16 x 2	2.205 (lbs)	327004
	40	50 - 28	1.811	1.059	—	—	M16 x 2	2.426 (lbs)	327005
	40	63 - 36	2.598	1.846	—	—	M16 x 2	3.087 (lbs)	327006
	40	80 - 36	2.598	1.846	—	—	M16 x 2	4.190 (lbs)	327007
	40	ER 40	3.149	2.397	4.566	2.480	M16 x 2	2.860 (lbs)	259079**
	50	50 - 28	1.811	1.059	—	—	M24 x 3	6.395 (lbs)	327017
	50	50 - 28	7.323	6.571	—	2.362	M24 x 3	13.230 (lbs)	327025
	50	50 - 28*	7.323	6.571	—	—	M24 x 3	10.805 (lbs)	327033
	50	63 - 36	2.205	1.453	—	—	M24 x 3	7.056 (lbs)	327018
	50	63 - 36	8.110	7.358	—	3.071	M24 x 3	19.625 (lbs)	327026
	50	63 - 36	8.110	7.358	—	—	M24 x 3	15.215 (lbs)	327034
	50	80 - 36	2.205	1.453	—	—	M24 x 3	8.159 (lbs)	327010
	50	80 - 36	10.079	9.327	—	3.543	M24 x 3	29.988 (lbs)	327027
	50	100 - 56	3.543	2.791	—	—	M24 x 3	11.687 (lbs)	327011
	50	100 - 56	11.417	10.665	—	—	M24 x 3	37.706 (lbs)	327028
	50	ER 40	3.149	2.173	5.275	2.480	M24 x 3	6.834 (lbs)	259080**
m	30	40 - 22	46.00	26.90	—	—	M12 x 1.75	0.50 (kg)	327001
	30	50 - 28	58.00	38.90	—	—	M12 x 1.75	0.80 (kg)	327002
	40	32 - 18	55.00	35.90	—	40.00	M16 x 2	1.10 (kg)	327003
	40	40 - 22	46.00	26.90	—	—	M16 x 2	1.00 (kg)	327004
	40	50 - 28	46.00	26.90	—	—	M16 x 2	1.10 (kg)	327005
	40	63 - 36	66.00	46.90	—	—	M16 x 2	1.40 (kg)	327006
	40	80 - 36	66.00	46.90	—	—	M16 x 2	1.90 (kg)	327007
	40	ER 40	80.00	60.90	116.00	63.00	M16 x 2	1.30 (kg)	259079**
	50	50 - 28	46.00	26.90	—	—	M24 x 3	2.90 (kg)	327017
	50	50 - 28	186.00	166.90	—	60.00	M24 x 3	6.00 (kg)	327025
	50	50 - 28*	186.00	166.90	—	—	M24 x 3	4.90 (kg)	327033
	50	63 - 36	56.00	36.90	—	—	M24 x 3	3.20 (kg)	327018
	50	63 - 36	206.00	186.90	—	78.00	M24 x 3	8.90 (kg)	327026
	50	63 - 36	206.00	186.90	—	—	M24 x 3	6.90 (kg)	327034
	50	80 - 36	56.00	36.90	—	—	M24 x 3	3.70 (kg)	327010
	50	80 - 36	256.00	236.90	—	90.00	M24 x 3	13.60 (kg)	327027
	50	100 - 56	90.00	70.90	—	—	M24 x 3	5.30 (kg)	327011
	50	100 - 56	290.00	270.90	—	—	M24 x 3	17.10 (kg)	327028
	50	ER 40	80.00	55.20	134.00	63.00	M24 x 3	3.10 (kg)	259080**

**NOTE:** Balanced refers to a specific residual imbalance of ≤4.00 gmm/kg

\* D<sub>4</sub> = (49.50 mm)

\*\*Balanced without clamping nut

i = Imperial (in)

m = Metric (mm)

**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

-Consult machine tool builder for machine's weight limitations.

-Refer to example on page B10-M: 11 for calculating tool assembly weight

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

**WARNING** Tool failure can cause serious injury. To prevent:

-Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)

-When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio

-When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio

-When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio


-When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio

-When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio


-Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

## Dual Contact BT Master Shanks (JIS B 6339)

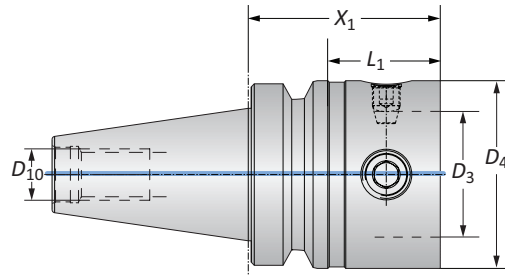

Taper Size		Connection	Shank			Weight	Part No.
		$D_4 \mid D_3$	$X_1$	$L_1$	$D_{10}$		
i	40	50 - 28	2.126	1.063	M16 x 2	2.646 (lbs)	353070
	40	63 - 36	2.520	1.457	M16 x 2	3.308 (lbs)	353071
	50	50 - 28	2.559	1.055	M24 x 3	8.820 (lbs)	353072
	50	63 - 36	2.953	1.449	M24 x 3	9.261 (lbs)	353073
	50	80 - 36	2.953	1.449	M24 x 3	10.584 (lbs)	353074
	50	100 - 56	3.543	2.039	M24 x 3	12.128 (lbs)	353075
m	40	50 - 28	54.00	27.00	M16 x 2	1.20 (kg)	353070
	40	63 - 36	64.00	37.00	M16 x 2	1.50 (kg)	353071
	50	50 - 28	65.00	26.80	M24 x 3	4.00 (kg)	353072
	50	63 - 36	75.00	36.80	M24 x 3	4.20 (kg)	353073
	50	80 - 36	75.00	36.80	M24 x 3	4.80 (kg)	353074
	50	100 - 56	90.00	51.80	M24 x 3	5.50 (kg)	353075



i = Imperial (in)  
m = Metric (mm)

**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)


**WARNING** Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

## BT Master Shanks (JIS B 6339)


Balanced

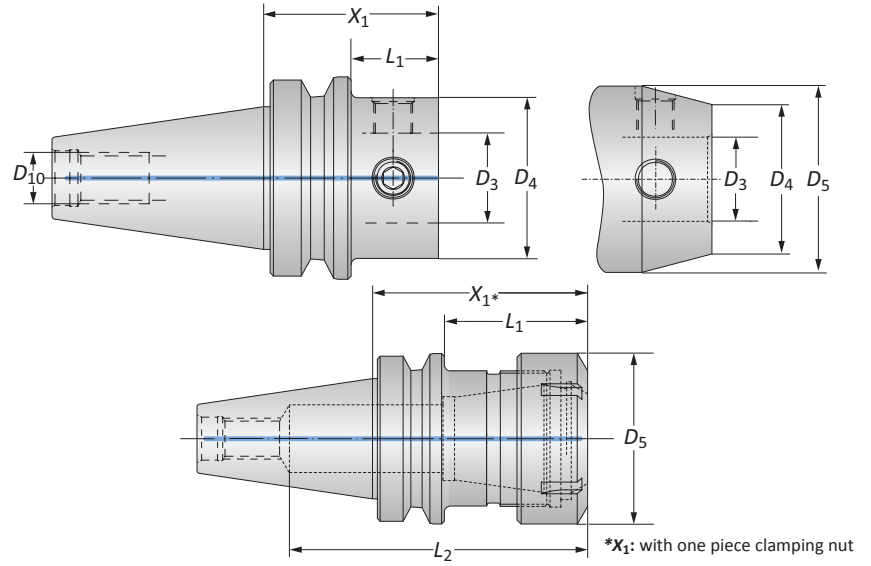

Taper Size		Connection	Shank					Weight	Part No.
			$X_1$	$L_1$	$L_2$	$D_5$	$D_{10}$		
i	30	40 - 22	1.575	0.710	—	—	M12 x 1.75	1.102 (lbs)	327012
	30	50 - 28	1.811	0.945	—	—	M12 x 1.75	1.323 (lbs)	327013
	40	40 - 22	1.811	0.750	—	—	M16 x 2	2.425 (lbs)	327016
	40	50 - 28	2.126	1.060	—	—	M16 x 2	2.646 (lbs)	327019
	40	63 - 36	2.520	1.457	—	—	M16 x 2	3.307 (lbs)	327020
	40	ER 40	2.755	1.692	4.094	2.480	M16 x 2	2.645 (lbs)	259081*
	50	50 - 28	2.559	1.060	—	—	M24 x 3	8.599 (lbs)	327021
	50	63 - 36	2.953	1.450	—	—	M24 x 3	9.261 (lbs)	327022
	50	80 - 36	2.953	1.450	—	—	M24 x 3	10.363 (lbs)	327023
	50	100 - 56	3.543	2.039	—	—	M24 x 3	12.127 (lbs)	327024
	50	ER 40	3.149	1.645	5.314	2.480	M24 x 3	8.377 (lbs)	259082*
m	30	40 - 22	40.00	18.00	—	—	M12 x 1.75	0.50 (kg)	327012
	30	50 - 28	46.00	24.00	—	—	M12 x 1.75	0.60 (kg)	327013
	40	40 - 22	46.00	19.00	—	—	M16 x 2	1.10 (kg)	327016
	40	50 - 28	54.00	27.00	—	—	M16 x 2	1.20 (kg)	327019
	40	63 - 36	64.00	37.00	—	—	M16 x 2	1.50 (kg)	327020
	40	ER 40	70.00	43.00	104.00	63.00	M16 x 2	1.20 (kg)	259081*
	50	50 - 28	65.00	26.80	—	—	M24 x 3	3.90 (kg)	327021
	50	63 - 36	75.00	36.80	—	—	M24 x 3	4.20 (kg)	327022
	50	80 - 36	75.00	36.80	—	—	M24 x 3	4.70 (kg)	327023
	50	100 - 56	90.00	51.80	—	—	M24 x 3	5.50 (kg)	327024
	50	ER 40	80.00	41.80	135.00	63.00	M24 x 3	3.80 (kg)	259082*

**NOTE:** Balanced refers to a specific residual imbalance of  $\leq 4.00$  gmm/kg

\*Balanced without clamping nut



i = Imperial (in)

m = Metric (mm)


**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
  - Refer to example on page B10-M: 11 for calculating tool assembly weight
- Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)


**WARNING** Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
  - When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
  - When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
  - When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
  - When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
  - When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
  - Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio
- Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

## NMTB Master Shanks

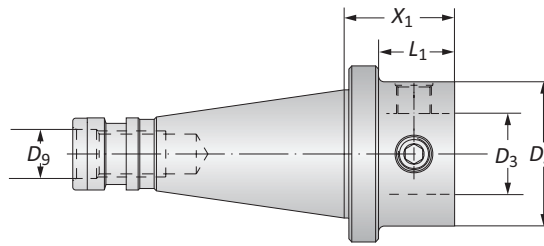

	Connection		Shank			Weight	Part No.
	Taper Size	$D_4$   $D_3$	$X_1$	$L_1$	$D_9$		
i	40	50 - 28	1.496	1.039	$\frac{5}{8}$ - 11	2.900 (lbs)	132022T004498
	40	63 - 36	1.890	1.433	$\frac{5}{8}$ - 11	3.300 (lbs)	132066T004498
	50	50 - 28	1.654	1.060	1 - 8	6.600 (lbs)	132022T004480
	50	63 - 36	2.047	1.450	1 - 8	7.700 (lbs)	132066T004480
	50	80 - 36	2.047	1.450	1 - 8	8.800 (lbs)	132088T004480
	50	100 - 56	3.543	2.945	1 - 8	10.800 (lbs)	132076T004480
m	40	50 - 28	38.00	26.40	$\frac{5}{8}$ - 11	1.30 (kg)	132022T004498
	40	63 - 36	48.00	36.40	$\frac{5}{8}$ - 11	1.50 (kg)	132066T004498
	50	50 - 28	42.00	26.80	1 - 8	3.00 (kg)	132022T004480
	50	63 - 36	52.00	36.80	1 - 8	3.50 (kg)	132066T004480
	50	80 - 36	52.00	36.80	1 - 8	4.00 (kg)	132088T004480
	50	100 - 56	90.00	74.80	1 - 8	4.90 (kg)	132076T004480



i = Imperial (in)  
m = Metric (mm)

**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio


Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:


- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

## Imperial Straight Master Shanks

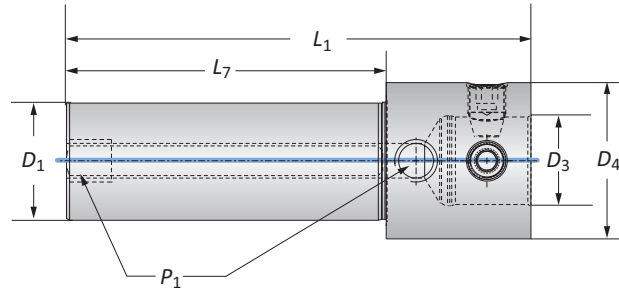

Connection	Shank					Weight	Part No.
	$D_4   D_3$	$L_7$	$D_1$	$P_1$	$L_1$		
i	40 - 22	3-½	1-¼	¼-27 NPTF	5.080	1.764 (lbs)	K71547
	50 - 28	4	1-½	¼-18 NPTF	5.810	3.086 (lbs)	K71548
	63 - 36	4-½	2	¼-18 NPTF	6.700	5.952 (lbs)	K71549
	80 - 36	4-½	2	¼-18 NPTF	6.700	7.716 (lbs)	K71550



key on B10-F: 1

i = Imperial (in)  
m = Metric (mm)

**⚠ WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight



Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**⚠ WARNING** Tool failure can cause serious injury. To prevent:


- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

## DIN 2080 Master Shanks

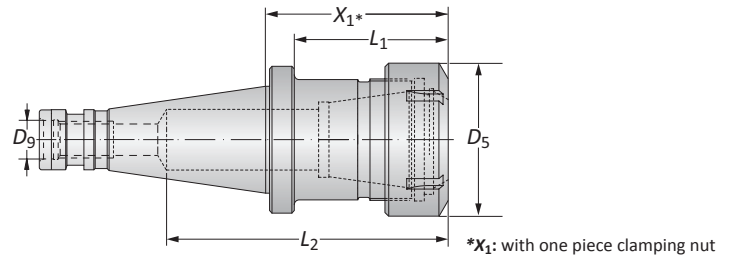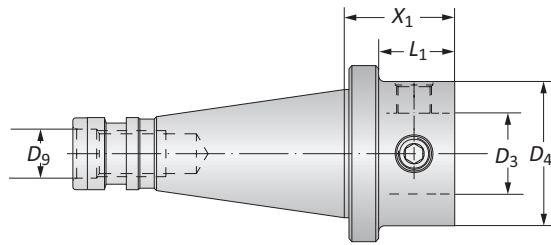

Taper Size		Connection	Shank					Weight	Part No.
		$D_4 \mid D_3$	$X_1$	$L_1$	$L_2$	$D_5$	$D_9$		
i	40	50 - 28	1.496	1.039	—	—	M16 x 2	2.866 (lbs)	132022T010229
	40	63 - 36	1.889	1.433	—	—	M16 x 2	3.306 (lbs)	132066T010229
	50	50 - 28	1.653	1.055	—	—	M24 x 3	6.613 (lbs)	132022T003704
	50	63 - 36	2.047	1.448	—	—	M24 x 3	7.716 (lbs)	132066T003704
	50	80 - 36	2.047	1.448	—	—	M24 x 3	8.818 (lbs)	132088T003704
	50	100 - 56	3.543	2.945	—	—	M24 x 3	10.800 (lbs)	132076T003704
	50	ER 40	3.149	2.551	5.276	2.480	M24 x 3	7.275 (lbs)	259084
m	40	50 - 28	38.00	26.40	—	—	M16 x 2	1.30 (kg)	132022T010229
	40	63 - 36	48.00	36.40	—	—	M16 x 2	1.50 (kg)	132066T010229
	50	50 - 28	42.00	26.80	—	—	M24 x 3	3.00 (kg)	132022T003704
	50	63 - 36	52.00	36.80	—	—	M24 x 3	3.50 (kg)	132066T003704
	50	80 - 36	52.00	36.80	—	—	M24 x 3	4.00 (kg)	132088T003704
	50	100 - 56	90.00	74.80	—	—	M24 x 3	4.90 (kg)	132076T003704
	50	ER 40	80.00	64.80	134.00	63.00	M24 x 3	3.30 (kg)	259084



i = Imperial (in)  
m = Metric (mm)

**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
- Refer to example on page B10-M: 11 for calculating tool assembly weight

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)


**WARNING** Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
- When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
- When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
- When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
- When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
- When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
- Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)





## DIN 1806 Morse Taper Master Shanks | R8 Master Shanks

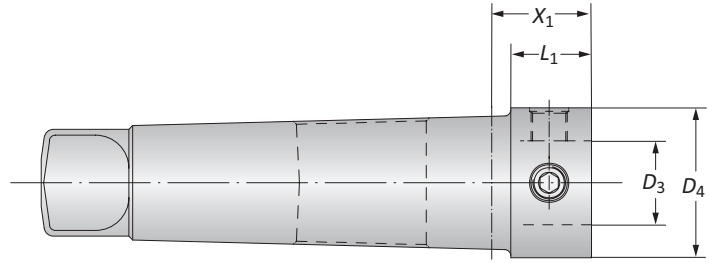


### DIN 1806 Master Shanks

	Morse Taper Size	Connection	Shank		Weight	Part No.
		$D_4   D_3$	$X_1$	$L_1$		
<b>i</b>	4	50 - 28	1.693	1.440	2.425 (lbs)	132022T003590
	5	50 - 28	1.299	1.050	3.968 (lbs)	132022T003920
	5	63 - 36	2.087	1.840	4.850 (lbs)	132066T003920
<b>m</b>	4	50 - 28	43.00	36.50	1.10 (kg)	132022T003590
	5	50 - 28	33.00	26.70	1.80 (kg)	132022T003920
	5	63 - 36	53.00	46.70	2.20 (kg)	132066T003920

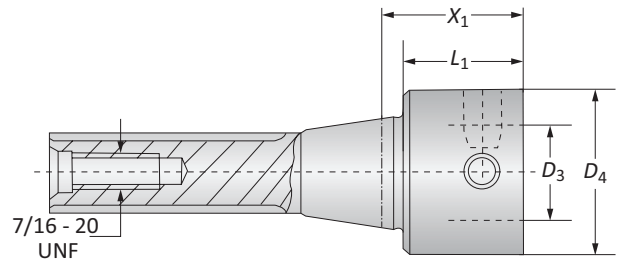

### R8 Master Shanks

	Connection	Shank		Weight	Part No.
	$D_4   D_3$	$X_1$	$L_1$		
<b>i</b>	50 - 28	1.770	1.417	2.204 (lbs)	132022T007166
	63 - 36	2.362	2.008	2.866 (lbs)	132066T007166
<b>m</b>	50 - 28	45.00	36.00	1.00 (kg)	132022T007166
	63 - 36	60.00	51.00	1.30 (kg)	132066T007166



**i** = Imperial (in)  
**m** = Metric (mm)


<b>⚠ WARNING</b> Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent: -Consult machine tool builder for machine's weight limitations. -Refer to example on page B10-M: 11 for calculating tool assembly weight Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611   email: <a href="mailto:appeng@alliedmachine.com">appeng@alliedmachine.com</a>	
<b>⚠ WARNING</b> Tool failure can cause serious injury. To prevent: -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank) -When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio -When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio -When using a NOVI <sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611   email: <a href="mailto:appeng@alliedmachine.com">appeng@alliedmachine.com</a>	

## Accessories

Coolant Adapter Sets | Service Keys | ISO 15488 (DIN 6499-B) Collet Chuck Accessories

### Coolant Adapter Sets


HSK Shank Size	Thread	Part No.
32	M10 x 1.5 x 1.0	262002
40	M12 x 1.75 x 1.0	262003
50	M16 x 2 x 1.0	262004
63	M18 x 2.5 x 1.0	262005
80	M20 x 2.5 x 1.5	262006
100	M24 x 3 x 1.5	262007

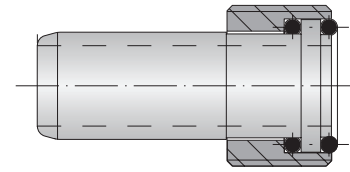

### Service Keys


HSK Shank Size	D	Part No.
32	8.50	315234
40	10.50	315235
50	14.50	215726
63	16.50	215727*
80	18.00	415127
100	22.00	215728

\*Two piece

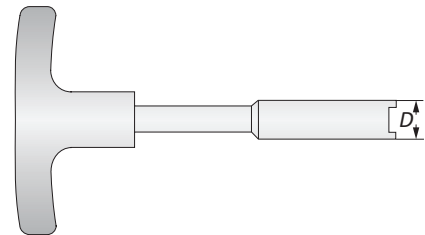



### ISO 15488 (DIN 6499-B) One Piece Clamping Nut

	Nominal Size	L <sub>1</sub>	D <sub>1</sub>	Part No.
i	ER 40	1.004	2.480	215926
m	ER 40	25.50	63.00	215926



### ISO 15488 (DIN 6499-B) Sealing Disk Clamping Nut

	Nominal Size	L <sub>1</sub>	D <sub>1</sub>	Part No.
i	ER 40	1.339	2.480	278001
m	ER 40	34.00	63.00	278001



i = Imperial (in)  
m = Metric (mm)




## Accessories

### ISO 15488 (DIN 6499-B) Collet Chuck Accessories


#### ISO 15488 (DIN6499-B) Collets

Clamping Range		Collet		
	$A$	$L_1$	$D_1$	Part No.
i	0.591 - 0.551	1.811	1.575	071790
	0.709 - 0.669	1.811	1.575	071793
	0.787 - 0.748	1.811	1.575	071795
	0.906 - 0.866	1.811	1.575	071798
m	15.00 - 14.00	46.00	40.00	071790
	18.00 - 17.00	46.00	40.00	071793
	20.00 - 19.00	46.00	40.00	071795
	23.00 - 22.00	46.00	40.00	071798

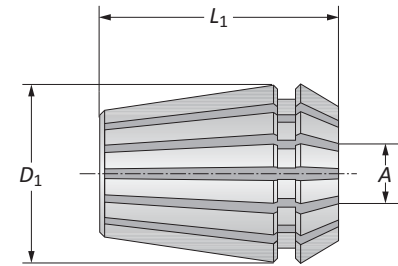


#### ISO 15488 (DIN 6499-B) Service Keys

Nominal Size		Service Key	Part No.
	$D$		
m	ER 40	63.00	215931


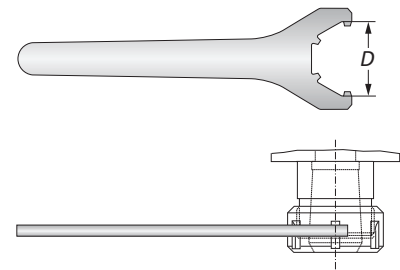


#### ISO 15488 (DIN 6499-B) Sealing Disks

Clamping Range		Part No.
i		
	0.591 - 0.551	278029
	0.709 - 0.669	278035
	0.787 - 0.748	278039
	0.906 - 0.866	278045
m	15.00 - 14.50	278029
	18.00 - 17.50	278035
	20.00 - 19.50	278039
	23.00 - 22.50	278045



#### Application with clamping nuts and sealing disks when using central coolant feed:

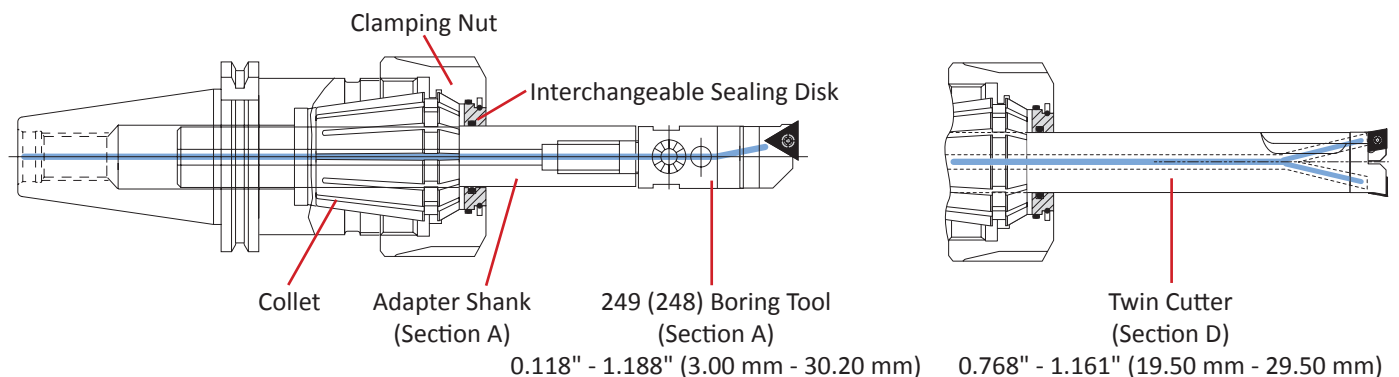

i = Imperial (in)  
m = Metric (mm)


## Accessories

### Mounting Fixtures



Mounting Fixture		
Code	Type	Part No.
Basic Body*	–	098060
Adapter	30 Taper	098073
Adapter	40 Taper	098061
Adapter	50 Taper	098062
Adapter	HSK-A 32	098063
Adapter	HSK-A 40	098064
Adapter	HSK-A 50	098065
Adapter	HSK-A 63	098066
Adapter	HSK-A 80	098067
Adapter	HSK-A 100	098068
Adapter	PSC 50	098069
Adapter	PSC 63	098070
Adapter	PSC 80	098071

\*Basic body and adapters sold separately



i = Imperial (in)  
m = Metric (mm)

**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.
  - Refer to example on page B10-M: 11 for calculating tool assembly weight
- Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank)
  - When using Alu-Line components, do not exceed recommended 5xD length-to-diameter ratio
  - When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio
  - When using a heavy metal reducer, do not exceed recommended 8xD length-to-diameter ratio
  - When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio
  - When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio
  - Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio
- Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

INDEX

# Guaranteed Test / Demo Application Form

Distributor PO #

The following must be filled out completely before your test will be considered

**IMPORTANT:** For processing, send Purchase Order to your Allied Field Sales Engineer (FSE). Please clearly mark the paperwork as "Test Order."

## Distributor Information

Company Name: \_\_\_\_\_  
Contact: \_\_\_\_\_  
Account Number: \_\_\_\_\_  
Phone: \_\_\_\_\_  
Email: \_\_\_\_\_

## End User Information

Company Name: \_\_\_\_\_  
Contact: \_\_\_\_\_  
Industry: \_\_\_\_\_  
Phone: \_\_\_\_\_  
Email: \_\_\_\_\_

**Current Process** List all tooling, coatings, substrates, speeds and feeds, tool life, and any problems you are experiencing

**Test Objective** List what would make this a successful test (i.e. penetration rate, finish, tool life, hole size, etc.)

## Application Information

Hole Diameter: \_\_\_\_\_ in/mm Tolerance: \_\_\_\_\_ Material: \_\_\_\_\_  
(4150 / A36 / Cast Iron / etc.)  
Preexisting Diameter: \_\_\_\_\_ in/mm Depth of Cut: \_\_\_\_\_ in/mm Hardness: \_\_\_\_\_  
(BHN / Rc)  
Required Finish: \_\_\_\_\_ RMS State: \_\_\_\_\_  
(Casting / Hot rolled / Forging)

## Machine Information

Machine Type: \_\_\_\_\_ Builder: \_\_\_\_\_ Model #: \_\_\_\_\_  
(Lathe / Screw machine / Machine center / etc.) (Haas, Mori Seiki, etc.)  
Shank Required: \_\_\_\_\_ Power: \_\_\_\_\_ HP/KW  
(CAT50 / Morse taper, etc.)  
Rigidity: Orientation: Tool Rotating: Thrust: \_\_\_\_\_ lbs/N  
☐ Excellent ☐ Vertical ☐ Yes  
☐ Good ☐ Horizontal ☐ No  
☐ Poor

## Coolant Information

Coolant Delivery: \_\_\_\_\_ Coolant Pressure: \_\_\_\_\_ PSI / bar  
(Through tool / Flood)  
Coolant Type: \_\_\_\_\_ Coolant Volume: \_\_\_\_\_ GPM / LPM  
(Air mist, oil, synthetic, water soluble, etc.)

## Requested Tooling

QTY	Item Number

QTY	Item Number



**Allied Machine & Engineering**  
120 Deeds Drive  
Dover, OH 44622

Telephone: (330) 343-4283  
Toll Free USA & Canada: (800) 321-5537  
Fax: (330) 602-3400  
Email: info@alliedmachine.com



## Warranty Information



Allied Machine & Engineering ("Allied Machine") warrants to original equipment manufacturers, distributors, industrial and commercial users of its products for one year from the original date of sale that each new product manufactured or supplied by Allied Machine shall be free from defects in material and workmanship.

Allied Machine's sole and exclusive obligation under this warranty is limited to, at its option, without additional charge, replacing or repairing this product or issuing a credit. For this warranty to be applied, the product must be returned freight prepaid to the plant designated by an Allied Machine representative and which, upon inspection, is determined by Allied Machine to be defective in material and workmanship.

Complete information as to operating conditions, machine, setup, and the application of cutting fluid should accompany any product returned for inspection. This warranty shall not apply to any Allied Machine products which have been subjected to misuse, abuse, improper operating conditions, improper machine setup or improper application of cutting fluid or which have been repaired or altered if such repair or alteration, in the judgement of Allied Machine, would adversely affect the performance of the product.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Allied Machine shall have no liability or responsibility for any claim, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein.

Allied Machine shall not be liable in contract or in tort (including, without limitation, negligence, strict liability or otherwise) for economic losses of any kind or for any special, incidental, indirect, consequential, punitive or exemplary damages arising in any way out of the performance of, or failure to perform this agreement.

ALL PRICES, DELIVERIES, DESIGNS, AND MATERIALS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Allied Machine & Engineering  
is registered to  
ISO 9001:2015 by DQS



Wohlhaupter GmbH  
is registered to  
ISO 9001:2015 by QA TECHNIC

## Deutschland | Österreich | Schweiz

**Wohlhaupter GmbH**  
Maybachstraße 4  
72636 Frickenhausen  
Germany

**Telefon:**  
+49 (0) 7022 408-0  
**Email:**  
info@wohlhaupter.de  
**Web:**  
www.wohlhaupter.com

## Europa

**Allied Machine & Engineering Co. (Europe) Ltd.**  
93 Vantage Point  
Pensnett Estate  
Kingswinford  
West Midlands  
DY6 7FR England

**Telefon:**  
+44 (0) 1384 400900  
**Email:**  
enquiries.eu@alliedmachine.com  
**Web:**  
www.alliedmachine.com

## Vereinigte Staaten

**Allied Machine & Engineering**  
120 Deeds Drive  
Dover OH 44622  
United States

**Telefon:**  
+1 330 343 4283  
**Fax:**  
+1 330 602 3400

**Allied Machine & Engineering**  
485 W Third Street  
Dover OH 44622  
United States

**Telefon:**  
+1 330 343 4283  
**Fax:**  
+1 330 364 7666  
(Engineering Dept.)

## Asien

**Wohlhaupter India Pvt. Ltd.**  
B-23, 2nd Floor  
B Block Community Centre  
Janakpuri, New Delhi - 110058  
India

**Telefon:**  
+91 11 41827044



日易晖 机械

### GOLDEN CARBIDE PRECISION

上海市天钥桥路325号嘉汇国际广场A栋2101-2102室 邮编: 200030

台北市敦化南路二段40号二楼 邮政编码: 106

上海: 86-21-3363-2088

天津: 86-22-5817-3069

成都: 86-28-8526-6681

长春: 86-431-8461-7085

重庆: 86-23-6757-3205

外高桥保税库: 86-21-5868-3075

台北: 886-2-2705-8448

台中: 886-4-24638159

Website: [www.goldencarbide.com](http://www.goldencarbide.com)

**www.wohlhaupter.com**

90200 06.2018

Printed in Germany · Technische Änderungen vorbehalten

Holemaking Solutions for Today's Manufacturing